
YOKOGAWA

ELECTRIC CHAIN HOIST

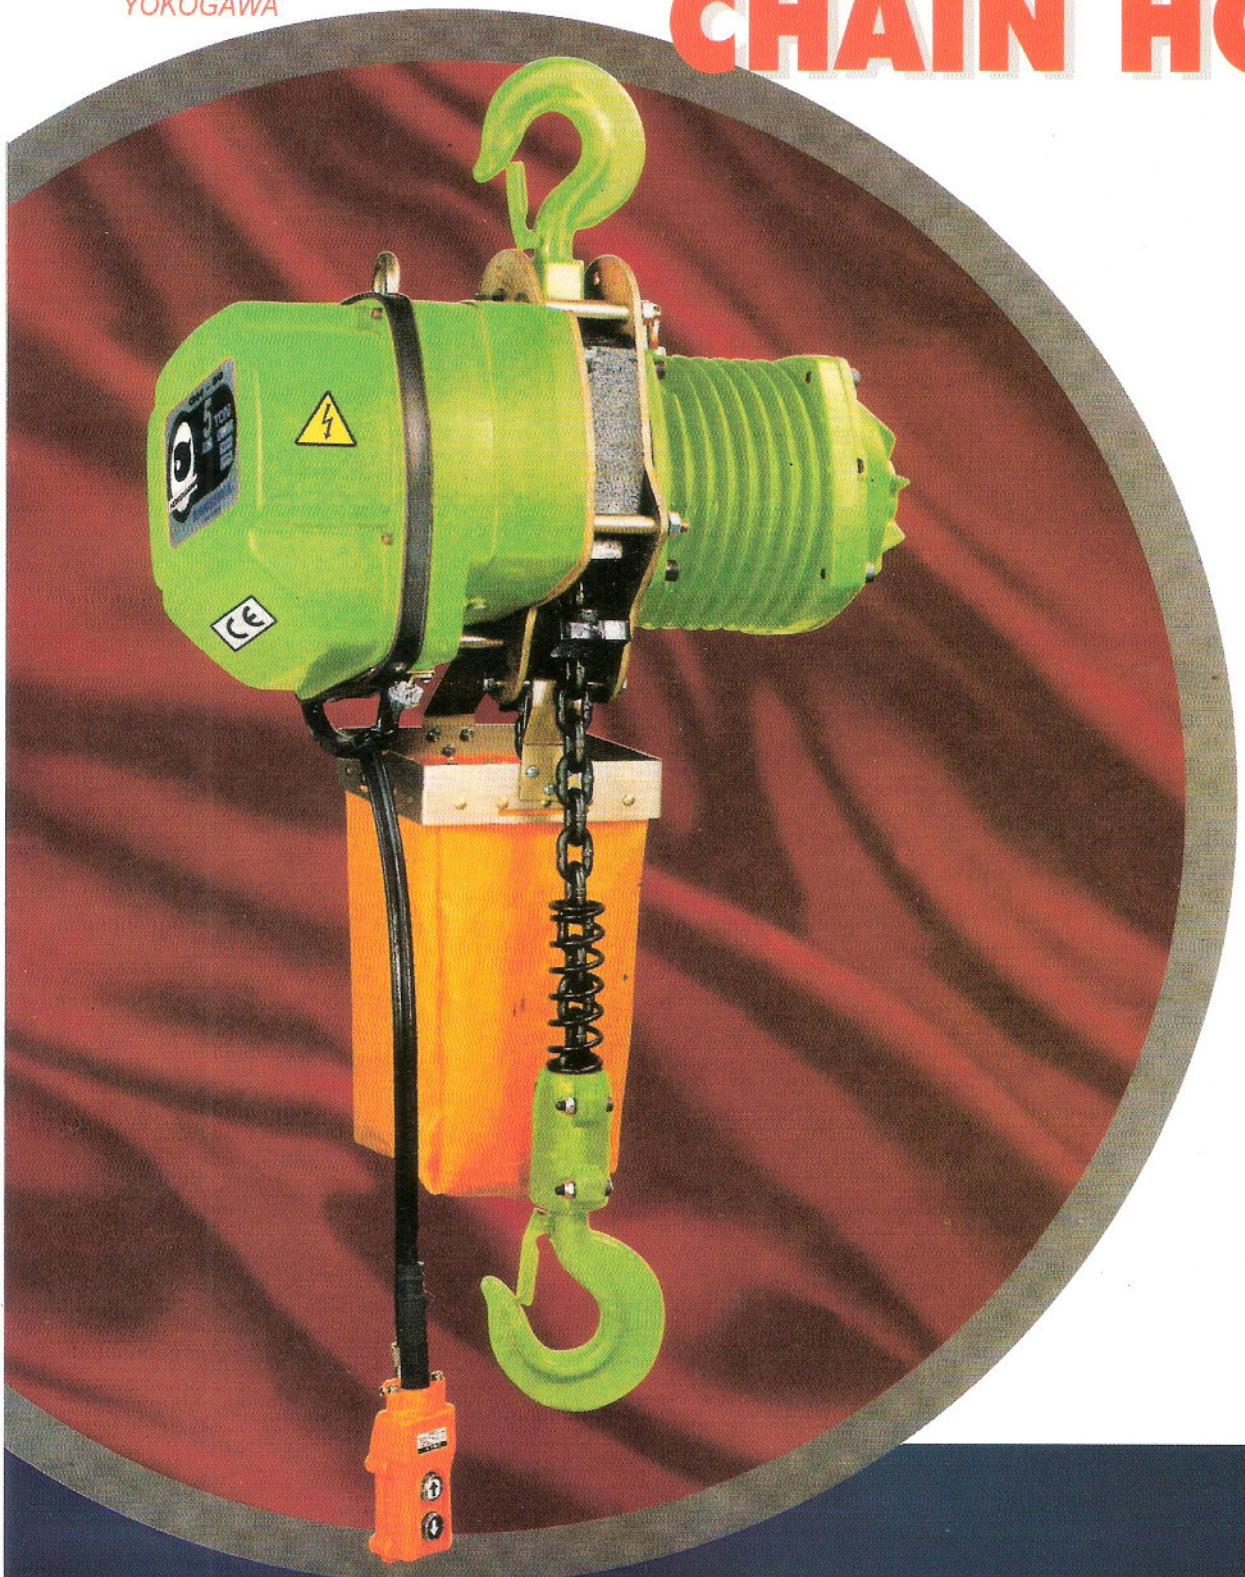

CE

QUALITY ASSURED FIRM ISO 9002 SGS

NATIONAL ACCREDITATION OF CERTIFICATION BODIES

YOKOGAWA MFG. CO., LTD.

Electric Chain Hoist

YOKOGAWA

PRODUCT CODE

G	H	L	—	100

G = YOKOGAWA H = HOIST L = TROLLEY


05 = 0.5 ton
10 = 1 ton
20 = 2 ton
30 = 3 ton
50 = 5 ton
75 = 7.5 ton
100 = 10 ton

ADVANTAGES :



FEATURES OF GH-05 - GH-30


- Control voltage optional, 24 V or 48 V.
- Automatic motor braking system upon power failure or switching off.
- Dual braking system.
- Negative phase detection to prevent hoist operating when incorrectly connected.
- Emergency stop optional.
- Electric overload protection optional.

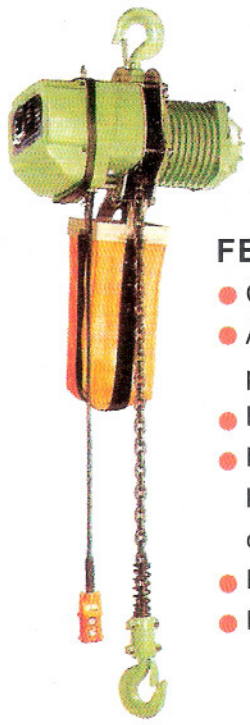

FEATURES OF GH-50 - GH-100

- Control voltage optional, 24 V or 48 V.
- Automatic motor braking system upon power failure or switching off.
- Dual braking system.
- Negative phase detection to prevent hoist operating when incorrectly connected.
- Emergency stop optional.
- Electric overload protection optional.


HOISTS WITH TROLLEYS

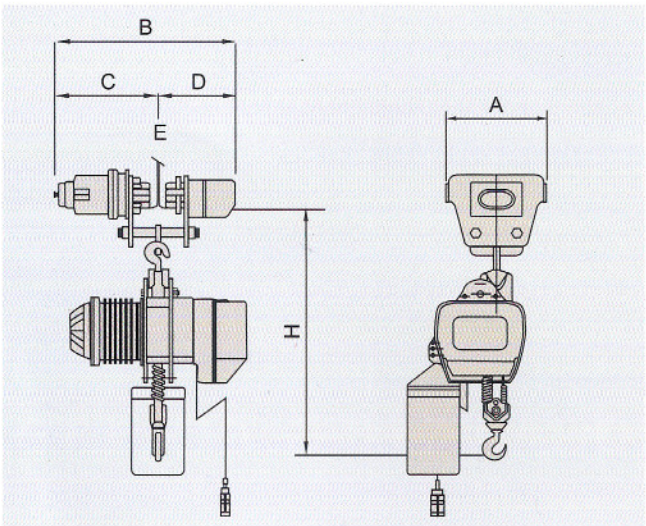



HOIST WITH TROLLEY'S DIMENSIONS (mm)


Model	Capacity (ton)	H	A	B	C	D	Flange Width E
GHL - 05 GHL - 10	1/2, 1	680	295	541	345	196	75 - 125
GHL - 20	2	890	323	567	358	209	100 - 150
GHL - 30	3	1030	359	662	417	245	125 - 175
GHL - 50	5	1200	389	673	422	251	125 - 175
GHL - 75	7.5	1300	400	736	465	271	150 - 200
GHL - 100	10	1415	536	821	550	271	150 - 200

YOKOGAWA

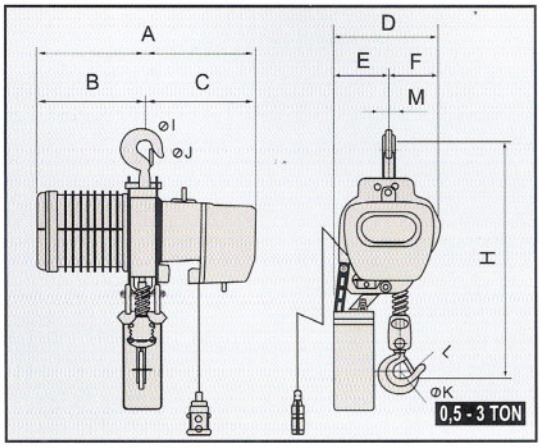

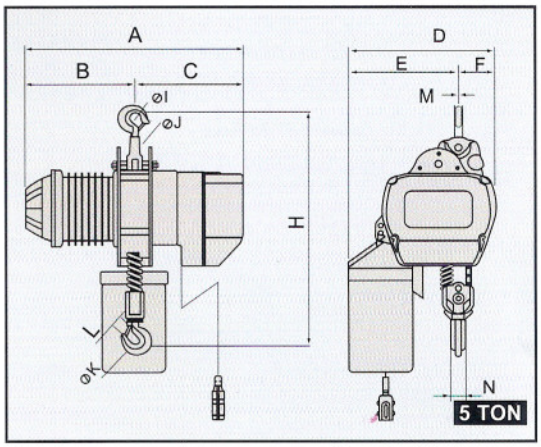

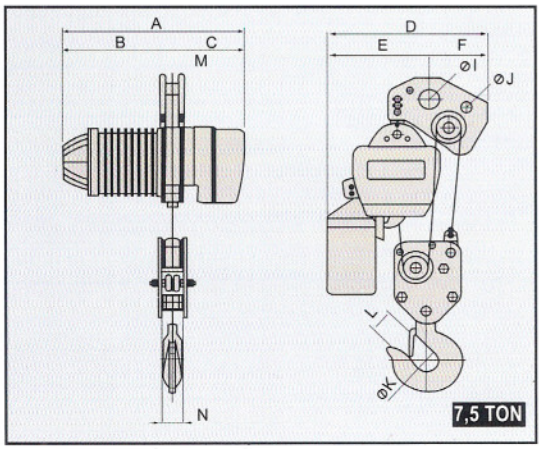

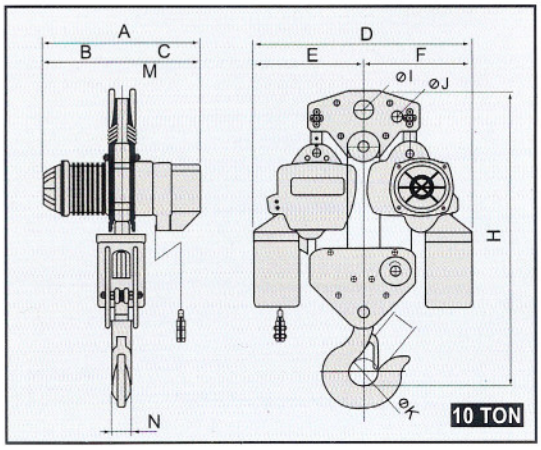

• Specifications


Model	Capacity (Tons)	Lift z (m)	Motor Output (kW)	Power Supplay	Lifting Speed (m/min.)		Load Chain (mm)	Load Chain Fall lines	Testing Load (Ton)	Net Weight (kg)
					50Hz	60Hz				
GH - 05	1/2	6	1.8	3 Phase 380 v 50Hz	9.2	11	Ø 7.1	1	0.625	51
GH - 10	1				6.7	8			1.25	51
GH - 20	2				3.3	4		2	2.5	69
GH - 30	3				2.2	2.6		3	3.75	75
GH - 50	5		3.7		2.6	3.2	Ø 11.2	2	6.25	155
GH - 75	7.5				1.8	2.1		3	9.4	198
GH - 100	10		3.7 x 2		2.6	3.2		4	12.5	420


• Dimensions

Model	Capacity (Tons)	H	A	B	C	D	E	F	I	J	K	L	M	N
GH - 05	1/2	570	505	245	260	240	115	125	32	30	32	30	28	22
GH - 10	1	570			260	240	115	125	32	30	32	30	28	22
GH - 20	2	700			260	240	175	65	40	30	40	30	28	28
GH - 30	3	880			260	280	175	105	52	47	52	47	35	35
GH - 50	5	1030	640	326	314	448	356	92	63	47	62	47	45	45
GH - 75	7.5	1050				587	388	199	72	40	80	60	124	53
GH - 100	10	1270				970	485	485	72	40	100	73	139	65

YOKOGAWA

MONORAIL MOTORIZED TROLLEY

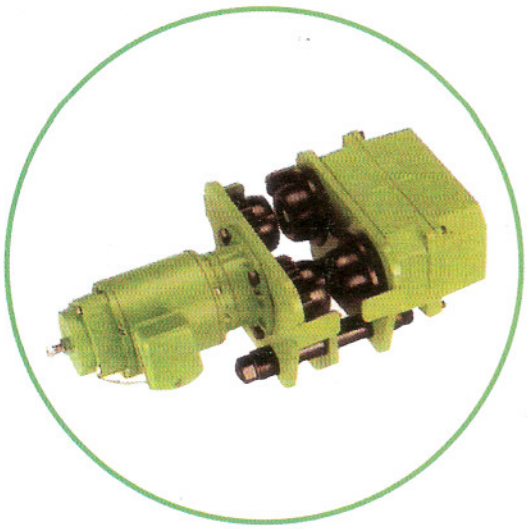

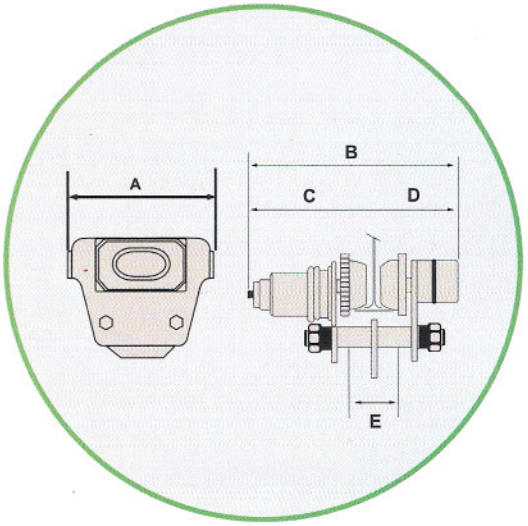

DIMENSIONS / SPECIFICATION (mm)

Model	Capacity (ton)	A	B	C	D	Flange Width E	Speed (m/min) 50HZ	Speed (m/min) 60HZ	Motor (kW)	N.W. (kgs)	Min radius of curve (m)
GL - 10	1	295	541	345	196	75 - 125	20	24/16	0.25 4 / 6P	40	1.3
							20/7	24/8	0.25 / 0.08 4 / 12P		
GL - 20	2	323	567	358	209	100 - 150	20	24/16	0.25 4 / 6P	45	1.5
							20/7	24/8	0.25 / 0.08 4 / 12P		
GL - 30	3	359	662	417	245	125 - 175	20	24/16	0.6 4 / 6P	65	1.8
							20/7	24/8	0.6 / 0.2 4 / 12P		
GL - 50	5	389	673	422	251	125 - 175	20	24/16	0.6 4 / 6P	89	2
							20/7	24/8	0.6 / 0.2 4 / 12P		
GL - 75	7½	400	736	465	271	150 - 200	13	16	0.9KWX6P	155	3
GL - 100	10	536	821	550	271	150 - 200	14	17	1.5kwx6P	218	3.5

YOKOGAWA MFG. CO., LTD.

Cat. No.1 01 - 02 Printed in Japan

DISTRIBUTED BY :